

Built Environment

Volume 36, Number 3

Published by Alexandrine Press and edited by Peter Hall and David Banister

Bus Rapid Transit: A Public Transport Renaissance

GUEST EDITOR: LLOYD WRIGHT



Built Environment

Volume 36, Number 3, 2010

© 2010 Alexandrine Press.
Written permission of the
publishers is required for the
reproduction of editorial matter.

ISSN 0263-7960

Published by Alexandrine Press

Alexandrine Press
1 The Farthings
Marcham
Oxon OX13 6QD
Telephone: 01865 391518
Fax: 01865 391687
E-mail:
Alexandrine@rudkinassociates.co.uk

Built Environment is
published four times a year.
2010 annual institution
subscription £250.00;
2010 annual individual
subscription £100.00 – includes
both print and online.

Contents and abstracts from
Vol. 23, no. 4 onwards are
available on RUDI (Resources
for Urban Design Information) at
[www.rudi.net/bookshelf/ej/
be/be.html](http://www.rudi.net/bookshelf/ej/be/be.html)

Built Environment is abstracted in
the *Journal of Planning Literature*,
Geo Abstracts, *Sage Urban Studies
Abstracts*, and is indexed in
the *Avery Index to Architectural
Periodicals*.

Art Production by PNR Design

Printed by technique studios,
Banbury

Cover images: Front: BRT in Bogotá;
back: Bangkok's BRT. Photos: Lloyd
Wright.

BUS RAPID TRANSIT: A PUBLIC TRANSPORT RENAISSANCE

Guest Editor: LLOYD WRIGHT

- Bus Rapid Transit: A Public Transport Renaissance
LLOYD WRIGHT 269
- Curitiba, The Cradle of Bus Rapid Transit
LUIS ANTONIO LINDAU, DARIO HIDALGO and
DANIELA FACCHINI 274
- BRT in Latin America: High Capacity and Performance,
Rapid Implementation, Low Cost
DARIO HIDALGO and AILEEN CARRIGAN 283
- Bus Rapid Transit in the United States
WILLIAM VINCENT 298
- The European Bus with a High Level of Service (BHLS):
Concept and Practice
ODILE HEDDEBAUT, BRENDAN FINN, SÉBASTIEN
RABUEL and FRANÇOIS RAMBAUD 307
- Africa: Transforming Paratransit into Bus Rapid Transit
ANNIE WEINSTOCK and AIMEE GAUTHIER 317
- Bus Rapid Transit in Australasia: An Update on Progress
GRAHAM CURRIE and ALEXA DELBOSC 328
- BRT's Influence on Public Transport Improvements in
Indonesian Cities
JOHN ERNST and HERU SUTOMO 344
- Bus Rapid Transit Projects in Indian Cities: A Status Report
GEETAM TIWARI and DEEPTY JAIN 353
- Bus Rapid Transit in China
KARL FJELLSTROM 363
- Publication Reviews 375

Built Environment online is hosted by Atypon Link (www.atypon-link.com)
Visit the Alexandrine Press website – www.alexandrinepress.co.uk

The European Bus with a High Level of Service (BHLS): Concept and Practice

ODILE HEDDEBAUT, BRENDAN FINN, SÉBASTIEN RABUEL and FRANÇOIS RAMBAUD

The paper discusses the respective American Bus Rapid Transit (BRT) and European Bus with a High Level of Service (BHLS) concepts and compares their approaches. It outlines how the BHLS concept has emerged in Europe and the conditions under which it has been implemented. Secondly, it describes the main BHLS characteristics, the gains in ridership findings for several case studies in different European countries and reports the main findings concerning ridership gains for ten specific bus lines: two in Sweden and two in France, and one each in The Netherlands, Germany, Spain, Italy, Ireland and Finland.

Introduction

Improvements in bus transport have been observed throughout Europe since the 1990s and are termed 'Bus with a High Level of Service' (BHLS). Sweden developed this concept with a 'trunk network' in Stockholm and BHLS lines in Jönköping, Lund and Gothenburg. England and Ireland do it under the name of 'Quality Bus Corridor'. France expands its concept of Bus à Haut Niveau de Service (BHNS) in many towns. Germany and Spain have their BHLS Metrobus concept and The Netherlands apply it under the name of Hoogwaardig Openbaar Vervoer (HOV). These countries have followed the same 'systemic' approaches that seek both to increase bus ridership and the quality of service and to adapt the service offered to the European urban and economic contexts.

In order to study European BHLS implementation, to develop a comprehensive approach to bus provision and to determine best practices, a collaboration between fourteen European countries¹ was launched through a COST² Action approved in April

2007 called 'Buses with a High Level of Service (BHLS): Fundamental characteristics and recommendations for decision-making and research'. The objectives of this paper are to share the current state of the art and know-how in this field, to find and compare the key results as well as to understand the limits and difficulties of the BHLS implementation.

The Development of BRT in North America

North American towns have developed with diffuse, low-density suburbs that do not favour mass transit. Indeed, car ownership growth has led to the construction of large highways rather than the development of rail or public transport networks. In this context, Bus Rapid Transit firstly emerged in the form of bus lanes on freeways known as 'busways' to improve the bus services and ease the Central Business District (CBD) access (Los Angeles in 1973 and 1979, Houston in 1979). Nevertheless, in the United States, these busways have often been turned into high occupancy vehicle (HOV) lanes. This answer to the oil crisis has decreased bus

performance (Vuchic *et al.*, 1994) due to the loss of dedicated lanes.

Later, BRT projects reappeared in the 1990s and focused on speed. BRT was then defined as 'a rapid mode of transportation that can combine the quality of rail transit and the flexibility of buses' (Levinson *et al.*, 2002). As their implementations increased in North and South America, the studies describe a wider spectrum of characteristics to define the BRT systems (Levinson *et al.*, 2003a, 2003b; Diaz, 2009). They are ranked from 'BRT Lite' to 'Full BRT' depending on their components (Gray *et al.*, 2006).

BRT Lite is the 'lower limit' of the BRT concept and must be at least faster than a normal bus line (Levinson *et al.*, 2003a). It is often achieved by greater spaces between stops and priorities at junctions. These lines often have their own identity by using a brand name, logo and specific colours applied to buses and stations. BRT Lite is the most common form of BRT in North America (the Vancouver B-line in 1996, Chicago since

1998, the MetroRapid Bus in Los Angeles since 2000, etc.).

Full BRT represents a bus system that is able to achieve a level of performance equal to that of a metro system. It necessitates full grade-separated transit ways, off-board fare collection, frequent and rapid services, modern and clean vehicles. Bogotá, Brisbane and Ottawa are the most famous Full-BRT examples described (Levinson *et al.*, 2003a; Wright and Hook, 2007). This kind of BRT is not really implemented in the United States, but this model is greatly admired and represents the ultimate reference point. Its operational performance combined with its flexibility could be integrated into an environment achieving higher urban densities (Hoffman, 2008).

Recently, the intermediate BRT-Heavy concept has emerged, emphasizing the on-street dedicated right-of-way at the heart of the system to cut time and ensure regular services (Gray *et al.*, 2006). Flagship projects such as the Cleveland Health Line and the Eugene EMX Green line will contribute to the development of this concept. Sixty-three per cent of American BRT projects scheduled for completion by 2017 include dedicated rights of way as an integral component (Kantor, 2008).

American research is now turned towards the integration of BRT projects into urban planning with a systemic vision like any other rapid transit system (Vuchic, 2005). Moreover, the creation of a specific body able to involve all the stakeholders at all planning levels is seen as a condition success (Arrillaga *et al.*, 2004; Danaher *et al.*, 2007). The most recent BRT studies focus on planning conditions, decision-making processes, BRT integration into existing networks, and the acceptability and image of these transportation systems (Golub *et al.*, 2007; Wright and Hook, 2007). Studies are being carried out on the perception of various public transportation systems in Los Angeles (Cain *et al.*, 2010) and on the influence of BRT stations on property value in Pittsburgh (Perk *et al.*, 2010).

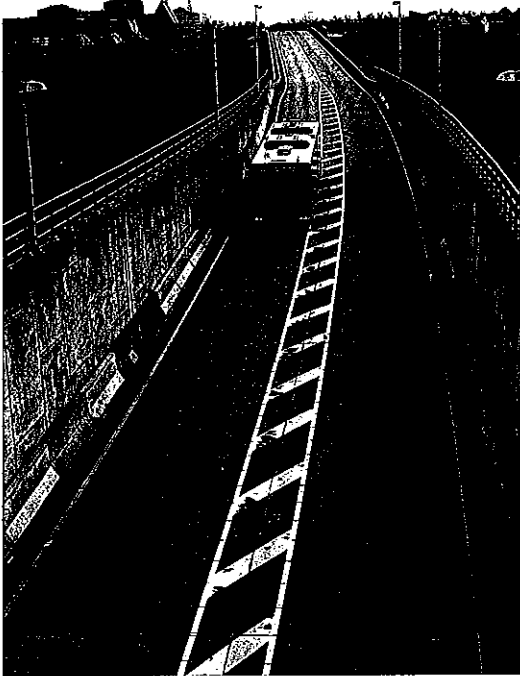


Figure 1. Amsterdam ZuidTangent. (Photo: Stads-regioAmsterdam, 2008)

Paris since 1993, TEOR in Rouen since 2001) and by adapting BRT to the French urban environment and 'transportation culture' (Babilote and Rambaud, 2005). In 2007, this French group decided to share its experiences with fourteen others European countries by launching a group of experts known as 'Cost BHLS' (www.bhls.eu). Emerging from this group is a shared view and some unique characteristics from each of the countries.

BHLS as BRT Inspired by Tramway Performance and Adapted to the European Context

In the United States, public transportation essentially answers the needs of commuters headed downtown, from extremely scattered and often far-off starting points. European urban models present relatively dense cities with narrow streets where most activities and residence are mixed. This has influenced the organization of public transportation, which takes advantage of concentrated flows. The demand for public transportation goes beyond peak hour commuting travel and covers all-day, evening and weekend use of the transit systems. In most European cities, metros, tramways and suburban trains already fulfil the needs of high capacity transit.

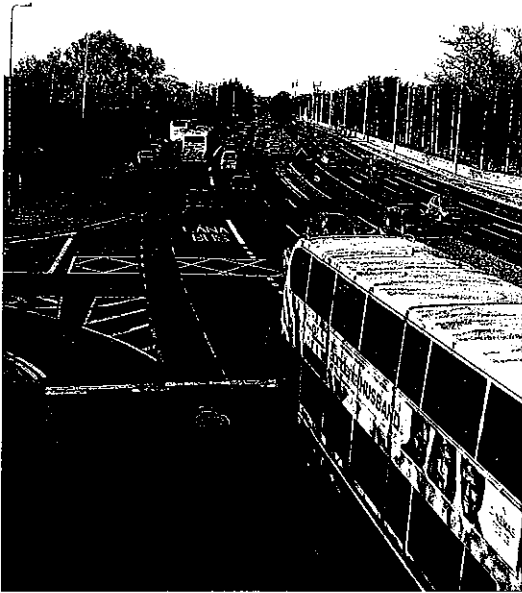


Figure 2. Dublin QBC Stillorgan Road. (Photo: Sven Allan Bjerkemo, 2008)

Since 2005, a French working group headed by CERTU, has defined its own concept of BRT based on initial local experiences (the 'new town' of Évry since the 1970s, the Trans-Val-de-Marne system of Greater



Figure 3. Hamburg – Metrobus XXL. (Photo: Thomas Knoller, October 2009)

European tramways are light systems operating mostly via exclusive on-street right-of-ways and integrated into the city with at-grade junctions and accessible platforms. Capacity is limited by intersection management, with maximum of 6,000 trips/hour/direction for a 45 metre long tram with a headway of 3 minutes. The tramway has reappeared in many cities where it had been dismantled, with a new high-performance and modern image and with a strong linkage to enhanced streets. At the same time, buses generally suffer from a negative image due to congestion, irregularity, discomfort and outdated designs.

The emergence of the BHLS concept in Europe can therefore be explained by the necessity to fill the gap between the regular bus and the tramway in terms of performance, cost and capacity. Throughfares not served by metros or tramways present a relatively low user-potential, which does not justify the higher tramway capacity associated with higher cost (€15–30 million per km, or \$30–70 million per mile). The BHLS approach tries to link the advantages of an economical bus-based system and performances of heavier systems. It has been inspired by American BRT with regard to methodology and design, favouring a transportation system in which the vehicle is but one of various components. Just like BRT, BHLS remains generic and can be integrated into any type of infrastructure configuration.

**European BHLS:
A Different Choice of
Components Compared
to America**

Very high-capacity configurations using grade-separated transit ways do not suit the European context (lack of available



Figure 4. Madrid Bus-VAO. (Photo: CRTM Madrid, October 2008)

space, undesirable urban cuttings, low demand). Nevertheless, inspired by tramway projects, the on-street exclusive lane constitutes the fundamental component allowing speed and regularity greatest gains,



Figure 5. Nantes BusWay® 4. (Photo: Odile Heddebaut, May 2008)



Figure 6. Paris – TVM. (Photo: Odile Heddebaut, May 2008)

and the possibility to share again the streets in favour of alternative modes (walking and cycling) despite occasional implementation difficulties (Heddebaut, 2007). BHLS can be implemented in congested zones, such as city centres. Moreover, the European concept of BHLS allows for a certain permeability of the exclusive lane, useful in case of a limited but heavily used route (taxis, cyclists, deliveries).

In comparison, in the United States, despite wider and often less congested avenues, the realization of on-street exclusive lanes remains limited. BRT systems more often use discontinuous and not well-marked bus-only lanes that are mostly limited to rush hours. Outside the CBDs, BRT circulation via reserved lanes is provided by the opportunity to re-develop unused railroads (Miami's South Dade Busway in 1997, the Pittsburgh Busway in 2000, the Los Angeles Orange Line in 2005, etc.) or the use of freeway shoulders. Nevertheless, attitudes are progressively evolving. With the implementation of the EMX Green Line in Eugene in 2007 and the Healthline in Cleveland in 2008, the United States now has two BRT Heavy projects using axial on-street exclusive lanes integrated into the urban environment (use of grass-planted lanes in Eugene, building-to-building regeneration on Euclid Avenue in Cleveland).

We can find other differences between the American BRT and the European BHLS

characteristics, in addition to their approach to interpreting exclusive right-of-way. In Europe, increase in stop-spacing is blocked by the resistance of users – in particular, disabled persons – while it is used by 89 per cent of future American projects planned for 2017 or earlier, (Kantor *et al.*, 2008). Off-board payment, which is rare in Europe, should develop with public awareness of this measure's effectiveness (54 per cent of the projects in USA). Lastly, while long commute times encourage Americans to retain a high number of seats in their vehicles, capacity needs and attempts to reduce costs lead to fewer seats in European vehicles. This design results in a higher proportion of standing passengers whose comfort could only be ensured by special modifications of the bus platform, generating additional costs.

While Full BRT is not present in Europe, numerous systems approach BRT Lite relying on a hierarchical organization of the bus network such as the blue buses of Stockholm since 1999, the Lianes of Dijon since 2004, and the Linea Alta Mobilità in Italy (Prato, Brescia, Pisa). But most of the new projects more or less correspond to America's BRT Heavy. That is the case in France with nine systems in operation and over twenty planned (Rabuel, 2009). It is also present in The Netherlands (Amsterdam in 2001, Eindhoven in 2005), England (Leeds in 1998, Cambridge in 2009), Sweden (Gothenburg



Figure 7. Stockholm – Blue Line. (Photo: Odile Heddebaut, May 2009)

in 2003, (Bjerkemo, 2007)), and Germany (Hamburg in 2005), and is being developed in Spain (Castellón in 2008, with projects planned for Madrid) and Italy (projects for Messina and Bologna).

Varying Institutional Frameworks and Cultures that Condition the Emergence of BHLS in Europe

Most European countries have legislation regulating the organization of public transportation. In these countries, BHLS services are scheduled, like tramways, within planning documents similar to urban travel plans. (Finn *et al.*, 2009)

However, this model does not apply to Great Britain. There, deregulation (outside the Greater London area) authorizes the implementation of bus routes on the initiative of the relatively numerous private operators. In this context, it is relatively difficult to envisage a global, integrated approach that favours the emergence of BHLS as single routes on dedicated running ways with a very high level of speed, comfort and information. Local authorities can just improve the network's performance by setting up bus lanes or bus priorities at traffic lights without a systemic approach. The focus on right-of-way is also a characteristic of the Dublin

approach to improving the bus service quality but with a different reason due to the fragmented responsibilities between the infrastructure planning and the bus service planning. Quality Bus Corridors (QBC) were created in Dublin since 1997 and are based on strongly identified, multi-route bus-only lanes which can also be used by taxis and cyclists (O'Mahony, 2002).

Contrary to Americans, Europeans have some difficulties in implementing bus lanes on freeways. That could be explained by the low co-ordination between the numerous stakeholders (urban and non urban transport authorities, freeways and roads managers, financial bodies). Nevertheless, the few and recent experimentations (HOV lane on the A6 freeway in Madrid region, shoulder bus lane on A48 freeway in Grenoble region in France) are showing a high potential for further development in Europe.

Ridership Gains Achieved with BHLS

BHLS in Europe is implemented for a wide range of objectives, as described above. Each system anticipates gains in ridership. To be more precise, the transportation, social, environmental or economic objectives can only be achieved when ridership gains are made. Two questions arise:

Table 1. Characteristics of selected BHLS systems in Europe.

<i>City</i>	<i>System Identity</i>	<i>System Length (km)/ (Dedicated Lanes)</i>	<i>Nature of Running Way</i>	<i>Passengers per Day</i>	<i>Peak Headway (Minutes)</i>	<i>Dedicated Fleet?</i>
Amsterdam	Zuid-Tangent	41 (33)	Bus-only road, bus lanes (suburban/orbital)	40,000	6	Yes
Dublin ¹	Quality Bus Corridor	12 (8.4)	Bus-lanes	34,000	< 1.5 ⁴	No
Gothenburg ²	TrunkBus	16.5 (7.5)	Bus-lanes	24,000	3.3	Yes
Hamburg ³	MetroBus	14.8 (4.0)	Bus-lanes	60,000	3.5	Yes
Helsinki	Jokeri Line	28 (6)	Bus-lanes (orbital route)	25,000	5	Yes
Madrid	Bus-VAO	16.1 (16.1)	Tidal segregated lanes (motorway insertion)	33,000 ⁵	< 1 ⁴	No
Nantes	BusWay	7 (6)	Bus-lanes	24,600	3.3	Yes
Paris	TVM	20 (19)	Bus-only road (suburban/orbital)	65,800	3.5	Yes
Prato	LAM	42 (15)	Bus-lanes	n/a	7	Yes
Stockholm	Blue Line	40 (12)	Bus-lanes	36,575 ⁶	5	Yes

Source: Case studies of the COST BHLS www.bhls.eu. Accessed 26 March 2010.

Notes:

1. Dublin data are for the Stillorgan Road Quality Bus Corridor, there are other QBCs.
2. Gothenburg data are for route 16, there are other TrunkBus lines.
3. Hamburg data are for the MetroBus Line 5; there are other MetroBus lines.
4. Dublin, Madrid systems operate multiple routes on their BHLS systems. Figure shows combined headway across all routes in direction of city centre.
5. The Bus-VAO system is tidal. Data shown are for inbound morning peak (0700–1000), for multiple bus routes and HOV occupants combined.
6. Passengers per day for Prato and Stockholm are averaged across multiple routes/corridors.

♦ whether BHLS really is effective in achieving ridership gains?

♦ which are the contributory factors to ridership gains?

The experience in Europe has been that BHLS systems do achieve ridership gains, and in some cases ridership can even double. BHLS systems frequently involve significant changes in structure and volume of service, in addition to the travel time and quality

improvements. While improvement in each of these attributes is well known to increase ridership, the holistic approach appears to achieve ridership gains which are 'more than the sum of the parts'.

To illustrate the European experiences, a set of ten BHLS systems is presented in tables 1 and 2 below. Table 1 presents primary characteristics of the BHLS systems, including the system length, nature of the running way, daily carryings and service headway during the peak periods. Table 2 presents changes in

Table 2. Ridership gains and related factors for selected BHLS systems in Europe.

City	System Identity	BHLS Ridership Change ²	Change in Operating Speed ³	Peak-Period Headway Reduction	Network Restructuring in the Corridor?	Major Tariff Restructuring as part of BHLS?	Unique Identity for BHLS Services
Amsterdam	Zuid-Tangent	+47%	Significant	Yes	Significant	No	Yes
Dublin ¹	Quality Bus Corridor	+125%	Major	Yes	Minor	No	No
Gothenburg ¹	TrunkBus	+73%	Moderate	Yes	Significant	No	Yes
Hamburg ¹	MetoBus	+20%	Minor	Yes	Minor	No	Yes
Helsinki	Jokeri Line	+100%	Significant	7 ⇌ 5	No	No	Yes
Madrid	Bus-VAO	+70–100%	+80–100%	Yes	Minor	No	No
Nantes	BusWay	+55%	Moderate	Yes	Significant	No	Yes
Paris	TVM	+134%	Significant	5 ⇌ 3.5	Significant	No	Yes
Prato	LAM	+57%	+5%	15 ⇌ 7	Major	No	Yes
Stockholm	Blue Line	+27%	0	Yes	No	No	Yes

Source: Case studies of the COST BHLS www.bhls.eu. Accessed 26 March 2010.

Notes:

1. Data for Dublin, Gothenburg and Hamburg are for specific BHLS lines as listed in table 1; these are the 'flagship' BHLS lines in each city.
2. The baseline for BHLS Ridership Growth is usually taken as prior to the major BHLS implementation. In some cases there had been gradual improvements in the preceding years, which are usually included in the baseline.
3. In some cases, the data were reported as changes in journey time.

ridership for each of the ten BHLS systems. This indicates growth in the range 20–134 per cent. Table 2 also presents likely explanatory factors for the ridership gains:

- ♦ percentage change in the service supply (measured in vehicle-km);
- ♦ percentage change in operating speed or journey time;
- ♦ scale of change in service headway;
- ♦ whether there was significant change to the network and/or route structure;
- ♦ whether there was significant change to the tariff structure or average tariff;
- ♦ whether the BHLS was given unique branding and strong marketing.

While we do not have full comparative

data for all sites, we can make the following observations:

- ♦ BHLS system daily ridership is in the range 24,000 to 68,000 passengers/day. These data are for individual corridors, and hence match or exceed the ridership of many tramway and North American BRT systems.
- ♦ All of the BHLS systems achieve significant ridership gains, in the range 20–134 per cent. It should be noted that this growth is achieved over a number of years as the systems mature.
- ♦ BHLS systems invariably offer improved frequency and volume of service.
- ♦ In many cases the network and lines within the BHLS corridor have been re-structured.
- ♦ In many cases, BHLS offers improved

operating speed and journey time, although in a few cases there has been little improvement in speed/time but a big improvement in reliability.

- ♦ All systems have a system identity and most have a unique brand and dedicated fleet.
- ♦ Marketing, image and product repositioning are a strong feature of BHLS systems.

It is clear that BHLS has achieved ridership gains and hence achieved many of its goals. Despite this, there is an extreme shortage of structured research into the individual and linked factors that achieve the ridership gains. This is urgently required to (a) assist future projects; (b) give better understanding of where funds are best targeted; and (c) provide feedback and evidence to policy-makers and transport operators about the effectiveness of investment in BHLS.

Conclusion

The following key points can be highlighted: successful BHLS projects require lengthy dialogue; the issue of choosing the right mode remains fundamental. As a mode, the bus appears flexible and well-adapted to new or progressive expanded urban zones (e.g. Almere in The Netherlands and the Fastrack project in The Thames Gateway area of Kent).

Buses allow a variety of configurations: from high-volume primary routes fed by secondary services through to trunk sections shared by several routes in order to minimize transfers. However, there are no traces of the express services that are so widely developed in high-capacity projects on the other side of the Atlantic.

Some BHLS projects are designed to be upgraded in future into tramway systems once there is sufficient demand. Europe's economic context and labour costs appear

to favour tramway for upwards of 30,000 to 50,000 trips/day and for volumes of over 2,000 to 2,800 passengers per hour per direction.

These projects are beginning to show signs of the same high-quality integration as tramway can do; the exclusive running lanes are easily passable in order to promote cycling and walking. It then becomes difficult to go beyond three-minute headways in order to maintain satisfactory service consistency.

A bus market specifically for BHLS appears to be emerging; this needs to be recognizable and provide the level of comfort and information associated with a well-defined corridor. The bi-articulated vehicle also appears to have its place in Europe (Hamburg, Utrecht, Geneva).

BHLS seems to have a highly promising market in Europe in small towns, medium-sized conurbations as well as in the outlying zones of the biggest metropolitan areas. Further information, including presentations of the plenary workshops, past and future, can be found on the website www.bhls.eu.³

NOTES

1. European participating countries: Belgium, Czech Republic, France, Germany, Greece, Ireland, Italy, Netherlands, Portugal, Romania, Spain, Sweden, Switzerland and United Kingdom.

2. COST Action is an intergovernmental European framework for international co-operation between nationally funded research activities. COST creates scientific networks and enables scientists to collaborate in a wide spectrum of activities in research and technology. COST activities are administered by the COST Office and are endorsed by the FP7. For further information, please visit: www.cost.esf.org

3. The first leaflet can be downloaded at http://www.bhls.eu/IMG/pdf/bhls_n1_gb_web.pdf.

REFERENCES

- Arrillaga, B., Wnuk, L. and Silver, F. (2004) *Bus Rapid Transit Demand Analysis Update*. Washington DC: Federal Transit Administration.

- Babilotte, C. and Rambaud, F. (ed.) (2005) *Bus with a High Level of Service: Concept and Recommendations*. Lyon: CERTU.
- Bjerkemo, S.A. (2007) Avancerade Kollektivtrafiksystem utomlands mellanformer mellanbuss och spårväg, Tillämpningsförsätningar i Sverige. Stockholm:VINNOVA.
- Cain, A. (2010) Tangible and Intangible Service Attributes. Quantifying the Importance of Image and Perception to Bus Rapid Transit. Paper presented to the 89th TRB Conference, Washington DC.
- Danaher, A., Levinson, H. and Zimmerman S. (2007) *Bus Rapid Transit: Practitioner's Guide*. Transit Cooperation Research Program Report 118. Washington, DC: Transportation Research Board.
- Diaz, R. (ed.) (2009) *Characteristics of Bus Rapid Transit for Decision-Making*. Washington DC: Federal Transit Administration.
- European Cooperation in Science and Technology (COST) n° TU0603, *Bus with a High Level of Service*. Available at www.bhls.eu. Accessed March 12, 2010.
- Finn, B., Heddebaut, O., Rabuel, S., van der Spek, D. and Brader, C. (2009) Buses with High Level of Service (BHLS) – Operational, Regulatory and Contractual Dimensions. 11th International Conference on Competition and Ownership in Land Passenger Transport, Delft.
- Golub, A. and Miller, M.A. (2007) A decision-support tool for Bus Rapid Transit Systems deployment, revised paper submitted for *Transportation Research Record*, Transportation Research Board, Washington, D.C., USA.
- Gray, G., Kelley, N. and Larwin, T. (2006) *Bus Rapid Transit, A Handbook for Partners*. Mineta Transportation Institute Report 06-02, San Jose State University.
- Heddebaut, O. (2007) Les difficultés de mises en œuvre des sites propres pour les modes de transport collectifs guidés ou non: le cas des lignes de bus à haut niveau de service. *Recherche Transport Sécurité*, No. 94, pp. 27–45.
- Hoffman, A. (2008) Advanced Network Planning for Bus Rapid Transit, The 'Quickway' Model as a Modal Alternative to 'Light Rail Lite'. Washington, DC: Federal Transit Administration.
- Kantor, D. (ed.) (2008) *Bus Rapid Transit, Vehicle Demand and System Analysis Update*. Washington, DC: Federal Transit Administration.
- Levinson, H.S., Zimmerman, S., Clinger, J. and Rutherford, S.C. (2002) Bus Rapid Transit: an overview. *Journal of Public Transportation*, 5(2), pp.1–30.
- Levinson, H.S., Zimmerman, S., Clinger, J. and Gast, J. (2003a) Bus Rapid Transit: synthesis of case studies. *Transportation Research Record*, No 1841, pp. 1–11.
- Levinson, H.S., Zimmerman, S., Clinger, J., Gast, J., Rutherford, S. and Bruun, E. (2003b) *Transit Cooperative Research Program, Report 90: Bus Rapid Transit, Vol. 2: Implementation Guidelines*. Washington DC: Transportation Research Board.
- O'Mahony, M. (2002) Quality bus corridors in Dublin. *Transportation Research Record*, No.1791, pp. 121–126.
- Perk V., Mugharbel, M. and Catala, M. (2010) Impacts of Bus Rapid Transit Stations on Surrounding Single-Family Home Values: Study of Pittsburgh East Busway. Paper presented to the 89th TRB Conference, Washington DC.
- Rabuel, S. (ed.) (2009) *Bus with a High Level of Service: Choosing and Implementing the Right System*. Lyon: CERTU.
- Vuchic, V.R, Bruun, E., Krstanoske, N., Euun Shin, Y., Kikuchi, S., Chakroborty, P. and Perincherry, V. (1994) *The Bus Transit System: Its Underutilized Potential*. Washington DC: Federal Transit Administration.
- Vuchic, V.R. (2005) Métros légers et liaisons rapides par autobus, modes concurrents ou complémentaires? *Transportation Public International*, pp.10–13.
- Wright, L. and Hook, W. (ed.) (2007) *Bus Rapid Transit Planning Guide*. New York: Institute for Transportation and Development Policy.